

DEF 007 Tank Alarm



007 Tank Alarms with DEF OVERFILL Guards.

- Tank gauge constructed from materials 100% compatible with Diesel Exhaust Fluid (DEF).
- Wall mount tank alarm can be installed up to 350 feet from tank.
- Built-in 103 decibel siren.
- Built-in, highly visible strobe light.
- Tank alarm includes a push button test switch.
- Toggle switch to silence the siren and a flashing LED light warns when siren is muted.
- AC power indicator light.
- DEF overfill guard tank gauge has durable silk screen painted graphics.
- Field adjustable length up to 72" (1,828.8 mm).
- Visi-Glo® level indicator clearly displayed in the large glass window.
- Easy to use, adjustable sensor for high or low alarm.

New Monitors and Alarms

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
008667	Audible and visual tank alarm with 12-volt transformer and overfill guard tank gauge with 2" NPS connection	7.0 (3.2)

Construction

Body	Tank Alarm - Weather resistant ABS Tank Gauge - Large glass housing
Chain	Stainless steel
Fasteners	Stainless steel
Connectors	Acetal
Linkage	Acetal
Float	DEF Compatible Anodized Aluminum
Seals	Flourocarbon
Connections	Tank Alarm - 1/2" Romex Connector Tank Gauge - 2" NPS threads




WARNING: Cancer and Reproductive Harm—www.P65Warnings.ca.gov



DEF 007 Tank Alarm

007 Tank Alarms with DEF OVERFILL Guards.

Dimensions and System Options

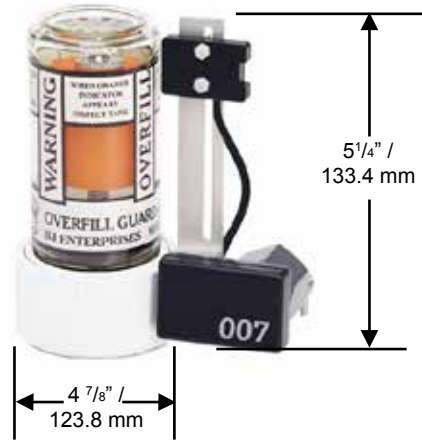

2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.